

Motorcycle Battery

YTX5L-BS


General Features

- ▶ Maintenance-free design
- ▶ Sealing structure of ABS materials
- ▶ Low self-discharge
- ▶ High CCA and good starting performance



Specifications

Nominal Voltage	Nominal Capacity (10HR)	Dimension			Weight $\pm 2\%$	Internal Resistance (m Ω)	CCA		Standard Terminals
		L	W	H			(-18°C)	(25°C)	
12V	5.5AH	113 \pm 2mm	69 \pm 2mm	107 \pm 2mm	Approx 1.88kg (4.14lbs)	22	55	120	Q55

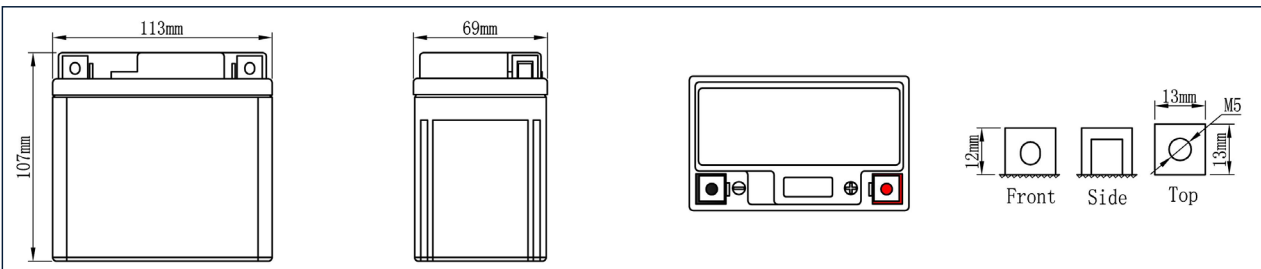

Charging Methods

Capacity Affected By Temperature	
40°C(104°F)	103%
25°C(77°F)	100%
0°C(32°F)	86%

Charging Methods	
Constant-Current Charge	Charging current:0.1C,when charging voltage up to 15.8V, continue to charge 4h.
Floating Charge	Charging current less than 0.25C Voltage: 13.60V~ 13.80V @ 25°C (77°F)

Performance Characteristics

