

# Motorcycle Battery

## YTX9A-BS


### General Features

- ▶ Maintenance-free design
- ▶ Sealing structure of ABS materials
- ▶ Low self-discharge
- ▶ High CCA and good starting performance



### Specifications

Nominal Voltage	Nominal Capacity (10HR)	Dimension			Weight $\pm 2\%$	Internal Resistance (m $\Omega$ )	CCA		Standard Terminals
		L	W	H			(-18°C)	(25°C)	
12V	9.0AH	150 $\pm$ 2mm	85 $\pm$ 2mm	107 $\pm$ 2mm	Approx 2.88kg (6.35lbs)	14.1	115	210	Q56

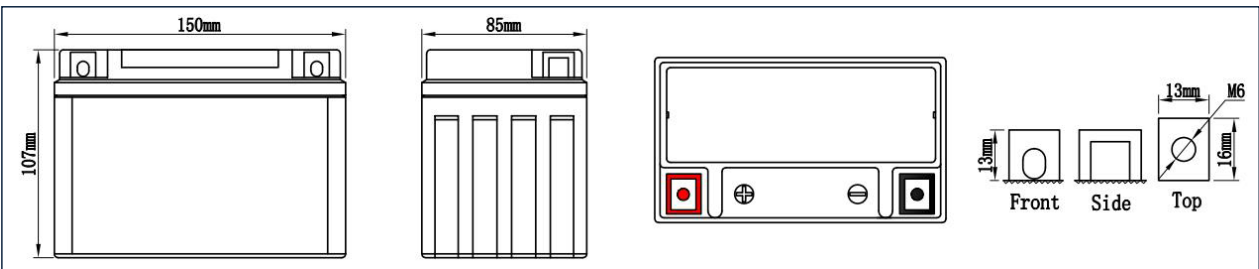

### Charging Methods

Capacity Affected By Temperature	
40°C (104°F)	103%
25°C (77°F)	100%
0°C (32°F)	86%

Charging Methods	
Constant-Current Charge	Charging current: 0.1C, when charging voltage up to 15.8V, continue to charge 4h.
Floating Charge	Charging current less than 0.25C Voltage: 13.60V ~ 13.80V @ 25°C (77°F)

### Performance Characteristics

